



6	7	8	
版本	Amend Record	Charger	Date
V1.0	First Version.		

File No:

Front 1:1

Side 10:1

Back 1:1

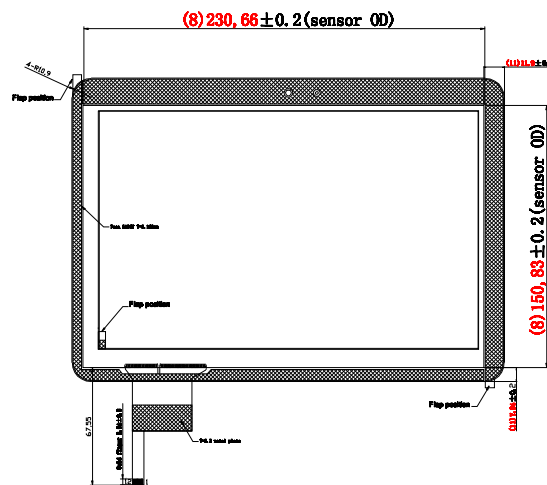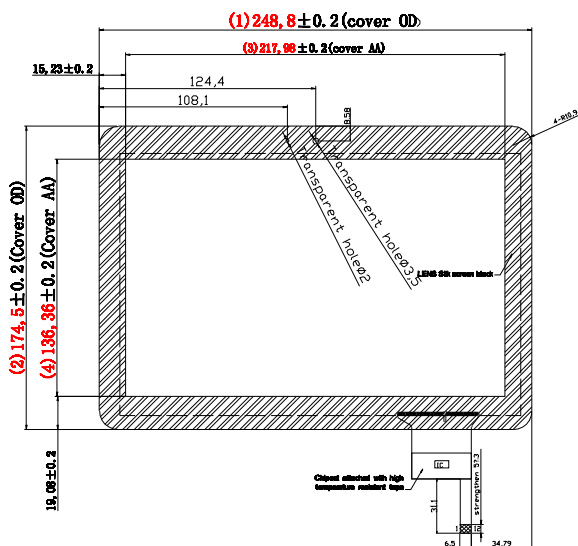

Tech Specs:

- Tech Specs: ITO GLASS:0.55mm
cover GLASS:0.7mm
Adhesive:0.165mm
IC:GT928(RX20*TX30)
- Working Volt: 2.8V-3.3V
- Transparency: ≥87%
- Surface Hardness: ≥7H
- Working environment: -10℃~+60℃, ≅90%RH
- Storage environment: -20℃~+70℃, ≅90%RH
- Tolerance: ±0.20mm
- Standard () is the key control size, Standard * is CPK control size.
- Products are RoHS compliant.

PIN	Logic
1	GND
2	NC
3	NC
4	NC
5	NC
6	GND
7	SDA
8	SCL
9	RSET
10	INT
11	VDD/3.3V
12	VDD/3.3V

客户确认签字:

 GreenTouch Technology Co.,Ltd		
DRAWN BY: 绘图:	PRODUCT MODEL: 产品型号: GT-CTP10011	VIEW:
CHECKED BY: 审核:	CUSTOMER ID: 客户编号:	投影方式: 第三角投影法
APPROVED BY: 批准:	DATE: 日期:	UNITS 单位: mm
Standard tolerance: 公差:	WEBSITE: 网址:	SCALE 比例: 1:1