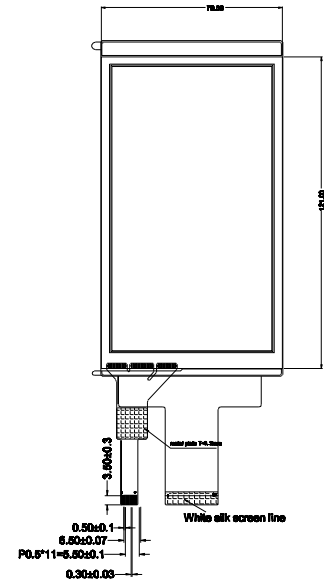
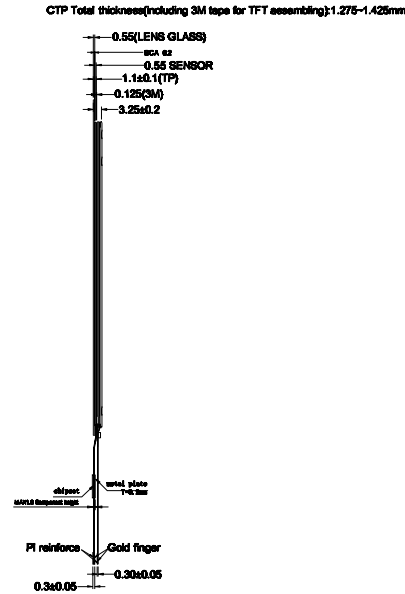
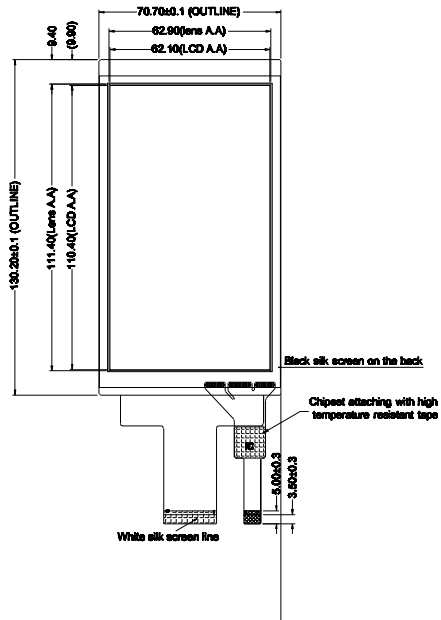


1	2	3	4	5	6	7	8	
File No:					版本	Amend Record	Charger	Date
					V1.0	First Version.		

Front 1:1

Side 10:1

Back 1:1





Technical Parameters:	
1.IC:	FT911 12*20
Cover GLASS:	0.55mm
SCA:	0.200mm
ITO SENSOR:	0.55
Lead:FPC (PINCH=)	0.5mm
Total thickness:	1.3±0.1mm
2.Operating Voltage:	2.8V IO Voltage:
3.Transparency:	≥83%
4.Tolerance:	6H
5.Working environment:	-20℃~+50℃, ≤90%RH
6.Storage environment:	-30℃~+60℃, ≤90%RH

Explanation:	
1. structure type:	G+G Structure.
2. Tolerance :	±0. 20;
3. Products are	RoHS compliant;

客户确认签字:

\_\_\_\_\_

 <b>GreenTouch Technology Co.,Ltd</b>		VIEW:  投影方式: 第三角投影法
DRAWN BY: 绘图:	PRODUCT MODEL: 产品型号: GT-CTP50028	
CHECKED BY: 审核:	CUSTOMER ID: 客户编号:	UNITS: mm SCALE: 1:1
APPROVED BY: 批准:	DATE: 日期:	
Standard tolerance: 公差:	WEBSITE: 网址:	