

PRODUCTS DATASHEET

LED Wall pack Light



IP65

Applications

- Courtyard
- Tunnel
- wall of the house
- Parking Lot of the Hotel
- Park

Product Advantages

- Lower energy consumption 50% energy saving,
- Longer lifespan than normal product.
- High CRI> 80(Ra)
- 5 years warranty
- Standards UL/CE/ROHS



Specification


Products Model	Electrical data			Photometrical data			Capabilities	Dimensions
	Wattage	Voltage	Power Factor	Luminous Flux	Color Temperature	Color Render Index	Dimmable Yes/No	length x width x height (mm)
TP-WA-A2-60W	60W	100-277V/305V	0.9	6600lm±5%	2700-6500 K	>80	No	432*290*75mm
TP-WA-A2-80W	80W	100-277V/305V	0.9	8800lm±5%	2700-6500 K	>80	No	432*290*75mm
TP-WA-A2-100W	100W	100-277V/305V	0.9	11000lm±5%	2700-6500 K	>80	No	432*290*75mm
TP-WA-A2-120W	120W	100-277V/305V	0.9	13200lm±5%	2700-6500 K	>80	No	432*290*75mm

Package Information

Products Model	QTY/CTN	Dimensions (length x width x height)	Volume	Gross weight
TP-WA-A2-60W	1 PCS	40*28*23.5(CM)/1PCS	0.026m ³	2.8KG
TP-WA-A2-80W				3.8KG
TP-WA-A2-100W				4.3KG
TP-WA-A2-120W				4.5KG



Product structure Size (Unit: mm)

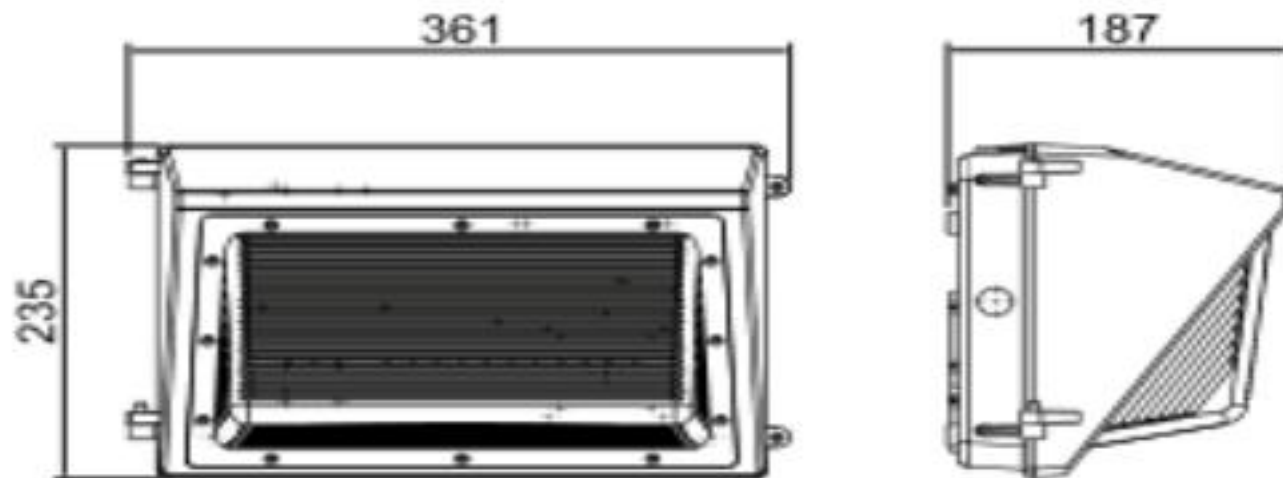

Applications



Packaging (1pcs/ctn) 40*28*23.5(CM)



DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.
