



# Wi-Fi Control Box

SCB2




Q | BroadLink International


For more promotions and supports

web: [www.ibroadlink.com](http://www.ibroadlink.com)  
e-mail: [support@ibroadlink.com](mailto:support@ibroadlink.com)

## Overview

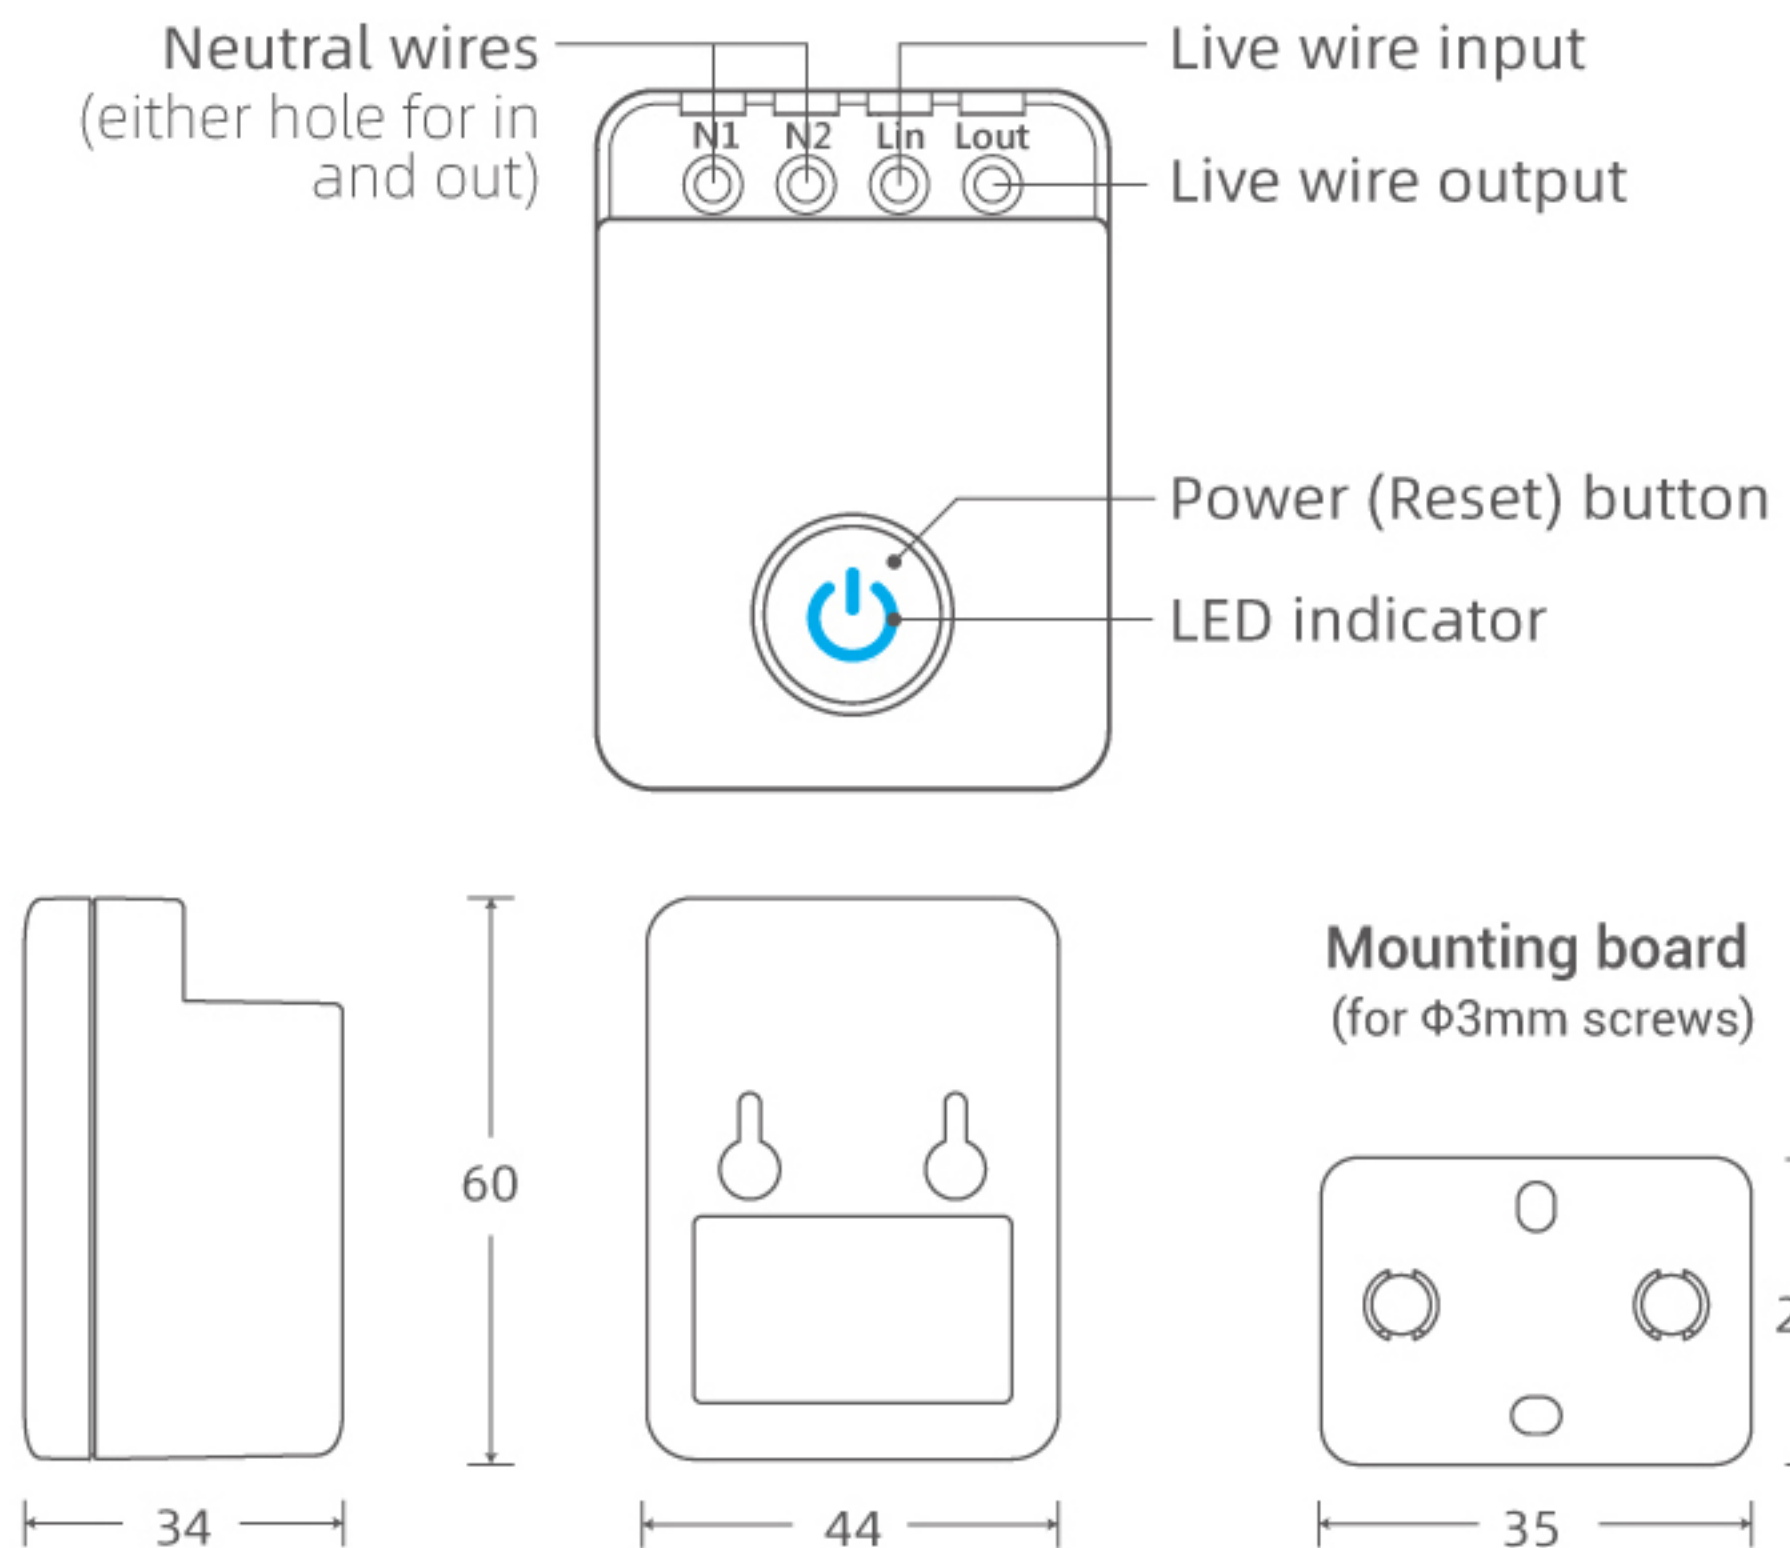

## Wiring Diagram

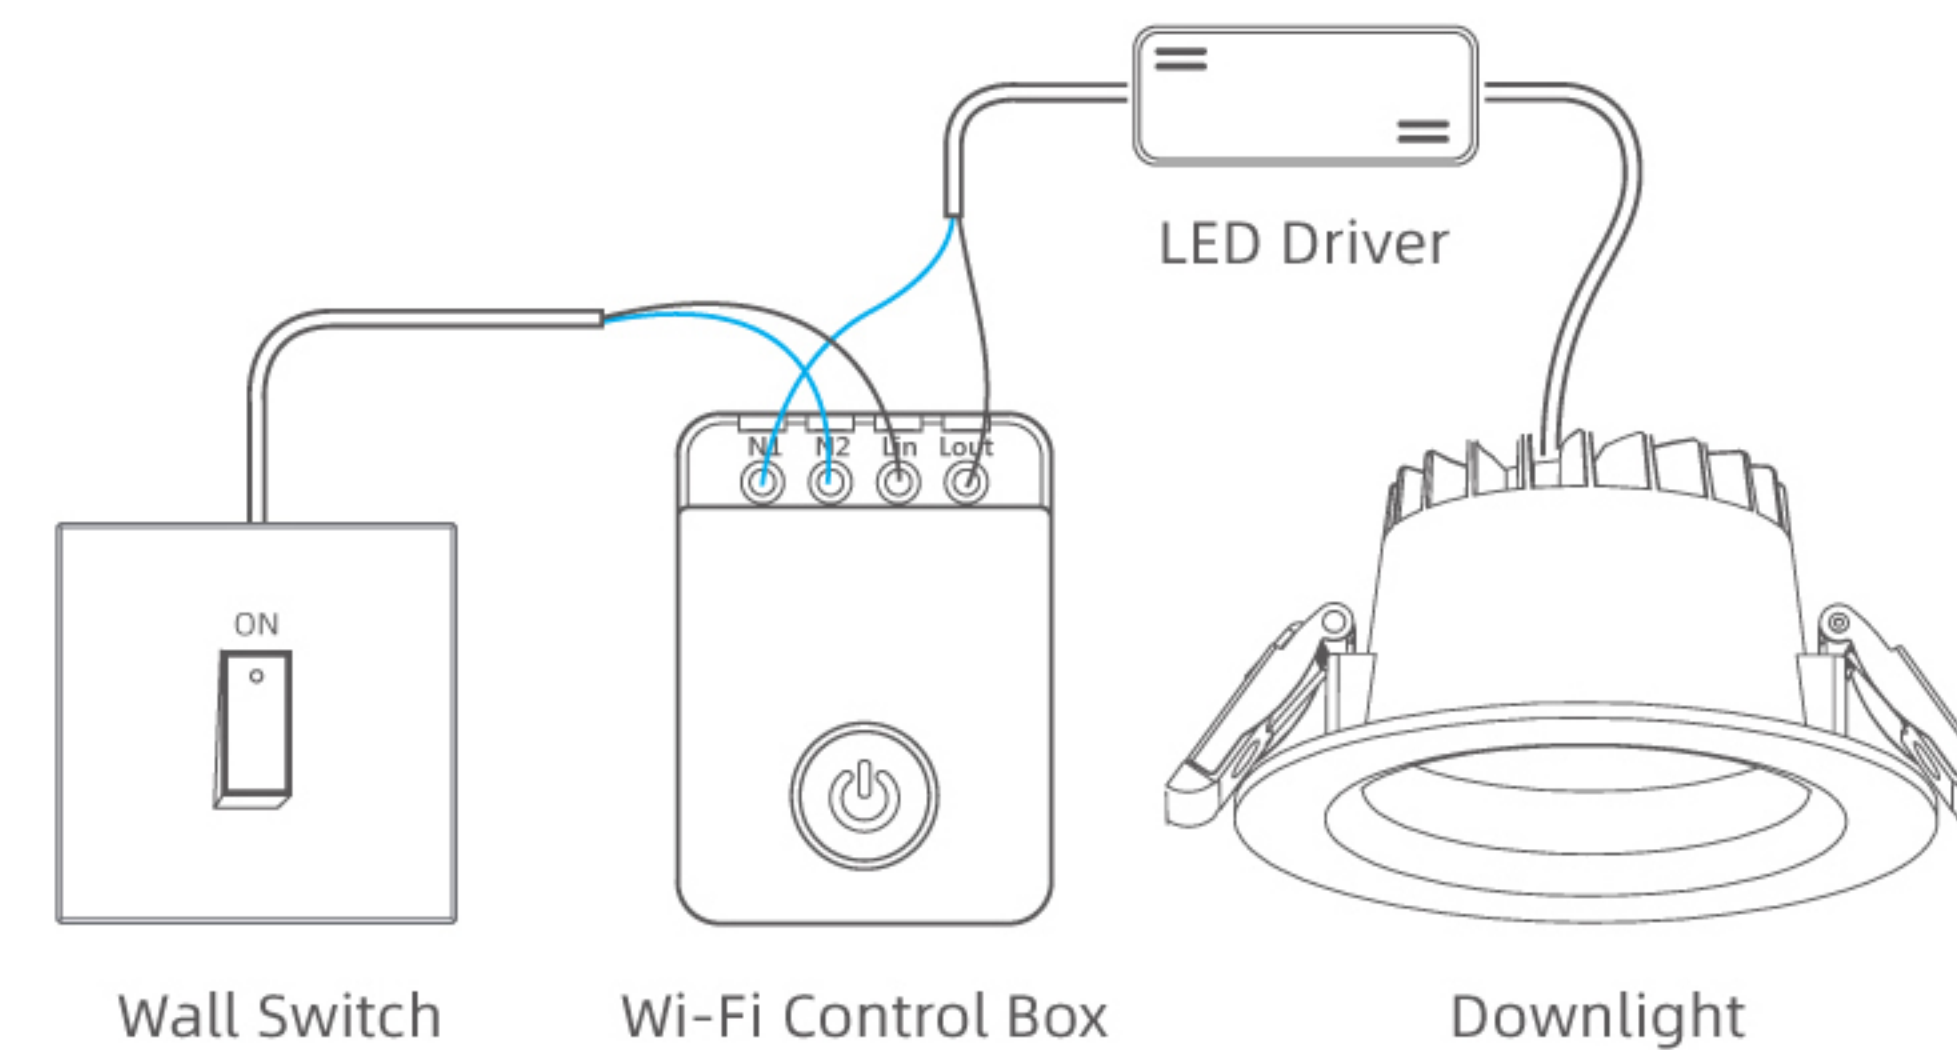

**BUILT-IN SWITCH  
DO NOT TOUCH TERMINALS WHILE IN USE  
KEEP WALL SWITCH ON FOR APP CONTROL  
THE PRODUCT IS BUILT IN LAMP OR CEILING TO BE FURTHER ENCLOSED**

## Indications

Status	Indication
Flashes intermittently	Device is in AP (NoAPP) Setup mode (waiting to be added).
Flashes quickly (5 times/sec)	Device is in Smart Setup mode (waiting to be added).
Flashes slowly then off	Device is being set up and added to network
Flashes slowly continuously	Device is failed to connect to network or disconnected from network
ON/OFF	Device is switched on/off

### Reset for AP (NoAPP) Setup

When the device is in any conditions, hold the power button for FIVE (5) seconds or switch the power supply of device (from external switch not device power button) for FIVE (5) cycles (off > on > off > on > off > on > off > on > off > on) until the LED indicator flashes intermittently.

### Reset for Smart Setup

When the device is in any conditions, hold the power button for TEN (10) seconds or switch the power supply of device (from external switch not device power button) for TEN (10) cycles (off > on > off > on...) until the LED indicator flashes quickly.

## Troubleshooting

### 1. I couldn't get popup landing page, what can I do?

After your phone is connected to "BroadLink\_WiFi\_Device" wireless network, open your phone web browser and input the address: "noapp.com".

### 2. I couldn't find home Wi-Fi network in landing page, what can I do?

You may not have 2.4GHz Wi-Fi network in your home, check the Wi-Fi settings from your router manufacturer.

### 3. I couldn't get verification code by email, what can I do?

Check your spam in email. If you are using email client, please try to check your email on webpage.

## Important notices

- For indoor use in dry environment only.
- Cut off power before installing.

