



6		7		8	
版本	Amend Record		Charger	Date	
V1.0	First Version.				

File No:


Front 1:1

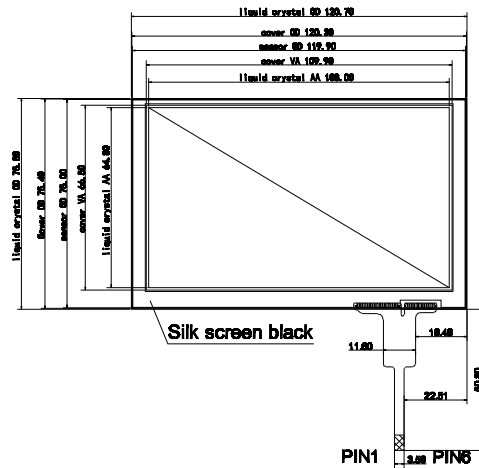

Side 10:1

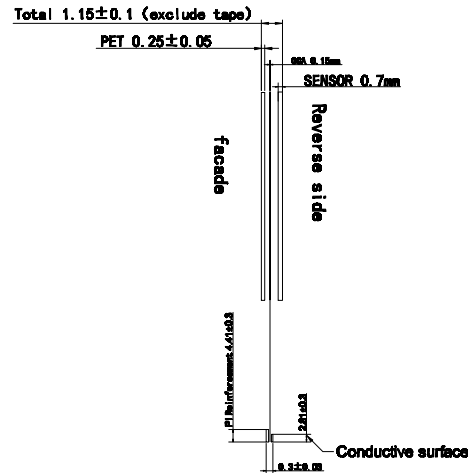

Back 1:1

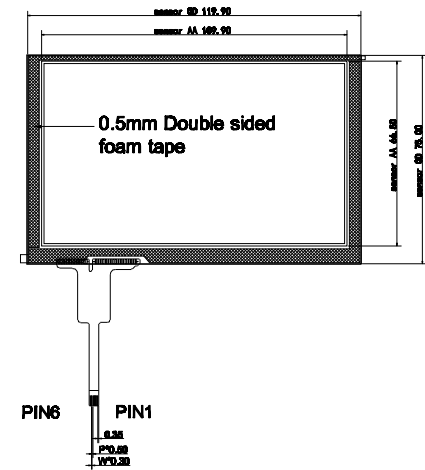

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

Tech Specs:

1. Structure: PET0.25mm+G(ITO SENSOR:0.7mm)
- Line :FPC (PINCH=0.5mm) IC:FT5436
- Thickness: 1.65±0.1mm
- 2.Working Volt: 2.8V-3.3 V
- 3.Transparency:≥85±2%
- 4.Surface Hardness: ≥3H
- 5.Working environment: -20°C~+70°C, ≤90%RH
- 6.Storage enviorment: -30°C~+80°C, ≤90%RH
- 7.Tolerance: ±0.1

PIN	PIN definition
1	RST
2	VDD
3	GND
4	INT
5	SDA
6	SCL

客户确认签字:

 GreenTouch Technology Co.,Ltd		
DRAWN BY: 绘图:	PRODUCT MODEL: 产品型号: GT-CTP50031	VIEW:  投影方式: 第三角投影法
CHECKED BY: 审核:	CUSTOMER ID: 客户编号:	UNITS: mm 单位:
APPROVED BY: 批准:	DATE: 日期:	SCALE: 1:1 比例:
Standard tolerance: 公差:	WEBSITE: 网址:	